



Lighting The Way Forward



**Ningbo Nblite Lighting Technology Co., Ltd.**

**OFFICE ADDRESS:** Room 609, No. 72, Yueming Road, Yinzhou District,  
Ningbo, China 315000


**FACTORY ADD:** No. 1018, Cidong Avenue, Binhai Development Zone,  
Cixi City, Ningbo, China

**WWW.NBLITE.COM**

**TEL:** 86 574 8790 8178

**FAX:** 86 574 8790 3268

**EMAIL:** sales@nblite.com

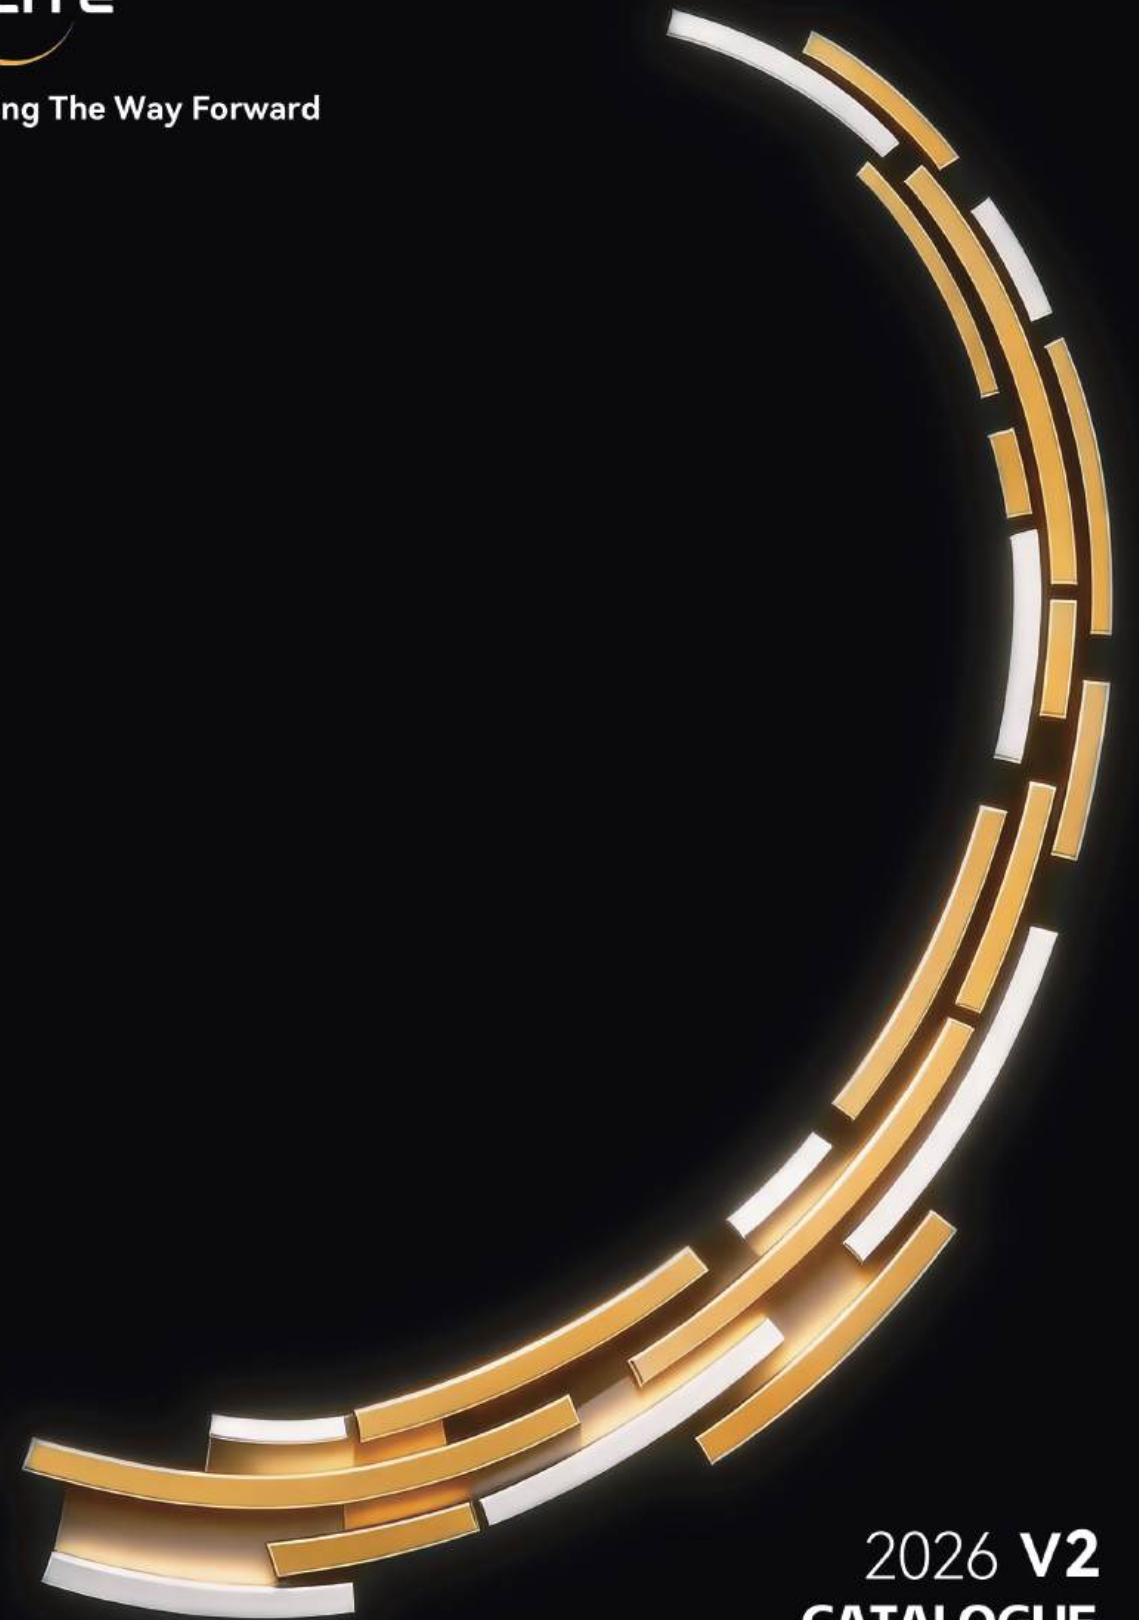

**2026 V2  
CATALOGUE**

# COMPANY PROFILE

# CATALOGUE

## Your Trusted Partner in Lighting Solutions

Founded in 2026, NBLITE is a forward-thinking lighting solution provider integrating design, development, sourcing, and sales. Backed by a core team with over 15 years of hands-on experience in manufacturing, quality control, and global trade, we bring mature expertise to the European market.

We specialize in commercial, industrial and residential LED lighting, providing customers with high-performance, energy-efficient and cost-effective products fully compliant with European market standards.

Our mission is to provide reliable, innovative lighting with strict quality control, transparent communication, and long-term partnership.

Experience Built on Light. Partnership Built on Trust.

03

BATTEN

11

LINEAR

17

TRI-PROOF

31

BULKHEAD

41

CEILING LIGHT



1

## LED Batten

Flicker-free LED battens ideal for schools, hospitals, and offices. 50,000-hour lifespan and high luminous efficacy deliver visual comfort and lower lighting costs.



NBT120

05



NBT111B

06



NBT116

07



NBT117

08



NBT118

09



NBT119

10

NBT120

- High-brightness LED chips, efficacy up to 140lm/W
- CCT and power switch option available
- White steel body, opal PC diffuser, and folding structure
- Surface or suspension mount with BESA fixing and central cable entry
- Plug-and-play sensor and EM kit for option



Folding structure, easier for electricians



| ITEM   | POWER | LUMEN | LM/W | SIZE         |
|--------|-------|-------|------|--------------|
| NBT120 | 18    | 2520  | 140  | 600x61x72mm  |
| NBT120 | 34    | 4760  | 140  | 1200x61x72mm |
| NBT120 | 48    | 6720  | 140  | 1500x61x72mm |
| NBT120 | 60    | 8400  | 140  | 1800x61x72mm |

NBT111B

- High-brightness LED chips, efficacy up to 140lm/W
- CCT and power switch option available
- White steel body, opal PC diffuser, no dark zones in linear connection
- Surface or suspension mount with BESA fixing and central cable entry
- Plug-and-play sensor and EM kit for option



Integral LED gear tray and diffuser, easy install.



| ITEM    | POWER | LUMEN | LM/W | SIZE         |
|---------|-------|-------|------|--------------|
| NBT111B | 20    | 2800  | 140  | 600x65x67mm  |
| NBT111B | 40    | 5600  | 140  | 1200x65x67mm |
| NBT111B | 50    | 7000  | 140  | 1500x65x67mm |
| NBT111B | 70    | 9800  | 140  | 1800x65x67mm |

NBT116

- Two body size with low and high output available, efficacy up to 140lm/W
- CCT and power switch option available
- White steel body, opal PC diffuser, and rotate-open end caps
- Surface or suspension mount with BESA fixing and central cable entry
- Plug-and-play sensor and EM kit for option



Rotate-open end caps, easy installation



| ITEM    | POWER | LUMEN | LM/W | SIZE         |
|---------|-------|-------|------|--------------|
| NBT116A | 20    | 2800  | 140  | 620x84x77mm  |
| NBT116A | 40    | 5600  | 140  | 1200x84x77mm |
| NBT116A | 60    | 8400  | 140  | 1500x84x77mm |
| NBT116A | 75    | 10500 | 140  | 1800x84x77mm |
| NBT116B | 20    | 2800  | 140  | 620x65x65mm  |
| NBT116B | 40    | 5600  | 140  | 1200x65x65mm |
| NBT116B | 60    | 8400  | 140  | 1500x65x65mm |
| NBT116B | 75    | 10500 | 140  | 1800x65x65mm |

NBT117

- Two body size with low and high output available, efficacy up to 160lm/W
- CCT and power switch option available
- White steel body, opal PC diffuser
- Surface or suspension mount with BESA fixing and central cable entry
- Plug-and-play sensor and EM kit for option



Fast-open diffuser, easy installation



| ITEM    | POWER | LUMEN | LM/W | SIZE          |
|---------|-------|-------|------|---------------|
| NBT117A | 20    | 2800  | 140  | 620x120x72mm  |
| NBT117A | 40    | 5600  | 140  | 1220x120x72mm |
| NBT117B | 40    | 5600  | 140  | 1170x170x79mm |
| NBT117B | 60    | 8400  | 140  | 1500x170x79mm |
| NBT117B | 75    | 10500 | 140  | 1800x170x79mm |

NBT118

- CCT and power switch selectable
- Polycarbonate body and diffuser
- Surface mounting for internal applications



Multi CCT and power by slide switch



| ITEM   | POWER | LUMEN | LM/W | SIZE         |
|--------|-------|-------|------|--------------|
| NBT118 | 20    | 2400  | 120  | 600x74x23mm  |
| NBT118 | 40    | 4800  | 120  | 1200x74x23mm |
| NBT118 | 50    | 6000  | 120  | 1500x74x23mm |
| NBT118 | 60    | 7200  | 120  | 1800x74x23mm |

NBT119


- Terminal box for quick wiring
- Folding clips for easy installation



Terminal box on backside




Folding clips for easy installation

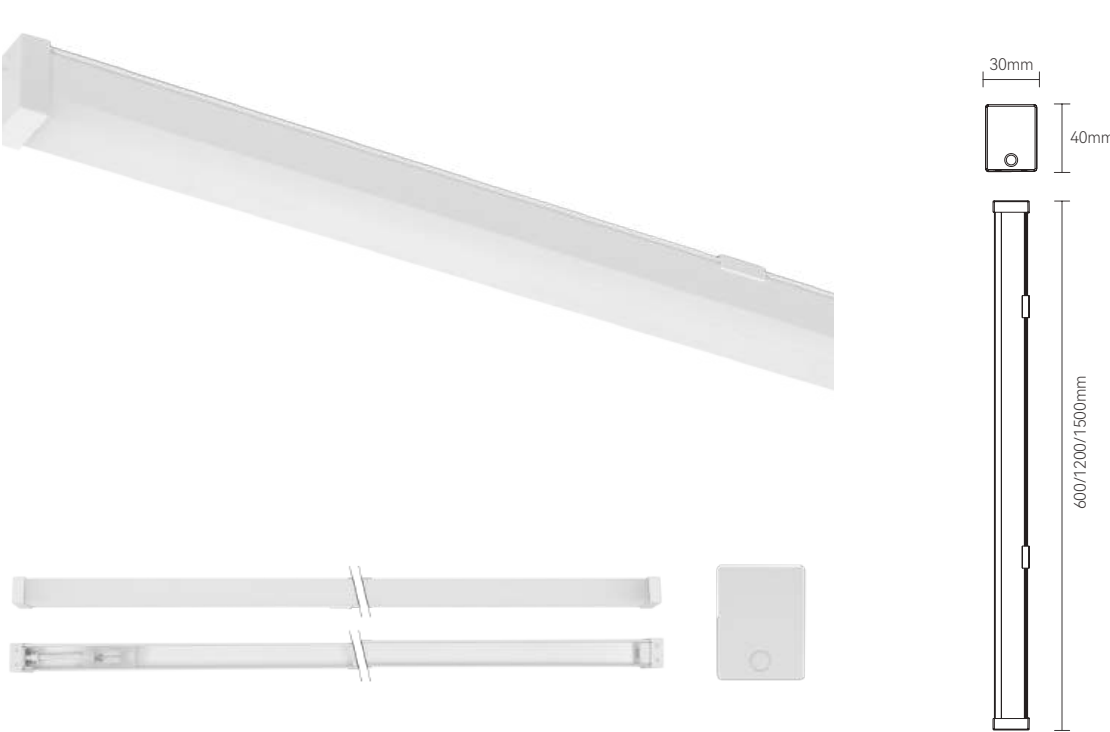

| ITEM   | POWER | LUMEN | LM/W | SIZE         |
|--------|-------|-------|------|--------------|
| NBT119 | 10    | 1000  | 100  | 600x30x40mm  |
| NBT119 | 20    | 2000  | 100  | 1200x30x40mm |
| NBT119 | 24    | 2400  | 100  | 1500x30x40mm |

# 2



## Linear Light

Versatile linear lights in different profiles, ideal for offices and schools.  
Linkable to create custom layouts. Up-down illumination and low-glare  
design offer multiple lighting choices.

NLN114



- Fast connecting one by one, easy for electricians
- Different shapes connector available: L, T, cross and round
- Different diffusers available: opal, micro-prism, reflector
- 3CCT & multi-power switch, up and down light version available



Rapid splicing



L, T, cross & round connectors

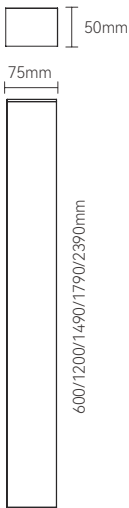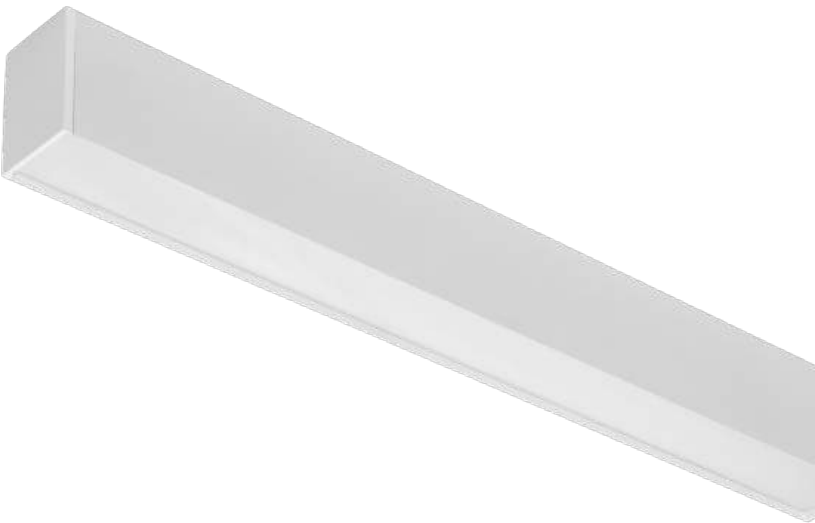

| ITEM     | POWER | LUMEN | LM/W | SIZE         |
|----------|-------|-------|------|--------------|
| NLN114   | 18    | 1800  | 100  | 600x50x75mm  |
| NLN114   | 30    | 3000  | 100  | 1200x50x75mm |
| NLN114   | 38    | 3800  | 100  | 1490x50x75mm |
| NLN114   | 45    | 4500  | 100  | 1790x50x75mm |
| NLN114   | 60    | 6000  | 100  | 2390x50x75mm |
| NLN114-L | 12    | 1200  | 100  | 155x75x155mm |
| NLN114-T | 9     | 900   | 100  | 250x75x150mm |
| NLN114-C | 15    | 1500  | 100  | 250x75x250mm |
| NLN114-R | 15    | 1500  | 100  | 225x75x230mm |

NLN125


- Up and down light version available
- 3CCT & multi-power switch model available
- Available in black, grey & white colors



Up & down light



3CCT & multi-power switch

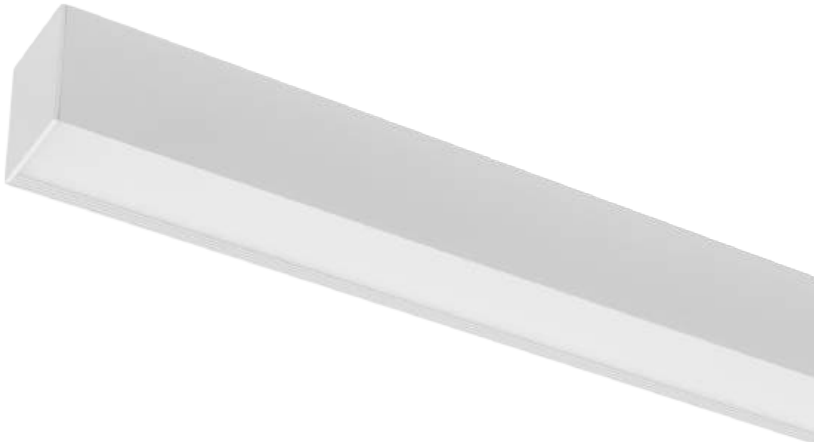


| ITEM   | POWER | LUMEN | LM/W | SIZE         |
|--------|-------|-------|------|--------------|
| NLN125 | 30    | 3300  | 110  | 600x68x90mm  |
| NLN125 | 40    | 4400  | 110  | 900x68x90mm  |
| NLN125 | 50    | 5500  | 110  | 1200x68x90mm |
| NLN125 | 60    | 6600  | 110  | 1500x68x90mm |

# NLN121

- Slim figure with 36° beam angle
- 3CCT switch model available
- Available in black, grey & white colors



36° beam angle



| ITEM   | POWER | LUMEN | LM/W | SIZE         |
|--------|-------|-------|------|--------------|
| NLN121 | 20    | 2000  | 100  | 600x25x85mm  |
| NLN121 | 24    | 2400  | 100  | 900x25x85mm  |
| NLN121 | 30    | 3000  | 100  | 1200x25x85mm |
| NLN121 | 36    | 3600  | 100  | 1490x25x85mm |
| NLN121 | 40    | 4000  | 100  | 1790x25x85mm |



3

## TRI-PROOF

Designed for tough conditions, our IP65 tri-proof luminaires resist moisture, dust, and corrosion. Perfect for factories, warehouses, and parking lots. Smart structure design for electricians' job easier.



NTP123 19



NTP111 20



NTP115 21



NTP116 22



NTP114 23



NTP120A 24



NTP120C 25



NTP122 26



NTP118 27




NTP119 28



NTP112 29

NTP123

- High-brightness LED chips, efficacy up to 140lm/W
- CCT and power switch option available
- Polycarbonate base and diffuser, stainless steel clips
- Plug-and-play sensor and EM kit for option



Speedfit LED geartray and diffuser



Long bracket distance, easy fit



| ITEM   | POWER | LUMEN | LM/W | SIZE         |
|--------|-------|-------|------|--------------|
| NTP123 | 18    | 2520  | 140  | 580x80x75mm  |
| NTP123 | 34    | 4760  | 140  | 1180x80x75mm |
| NTP123 | 48    | 6720  | 140  | 1480x80x75mm |

NTP111

- High-brightness LED chips, efficacy up to 140lm/W
- CCT and power switch option available
- Polycarbonate base and diffuser, stainless steel clips
- Plug-and-play sensor and EM kit for option



Speedfit LED geartray and diffuser



15cm bracket distance, easy fit



| ITEM   | POWER | LUMEN | LM/W | SIZE         |
|--------|-------|-------|------|--------------|
| NTP111 | 18    | 2520  | 140  | 580x75x80mm  |
| NTP111 | 34    | 4760  | 140  | 1180x75x80mm |
| NTP111 | 48    | 6720  | 140  | 1480x75x80mm |
| NTP111 | 60    | 8400  | 140  | 1780x75x80mm |

NTP115

- Two body size with low and high output available, efficacy up to 140lm/W
- CCT and power switch option available
- Polycarbonate base and diffuser, stainless steel clips
- Plug-and-play sensor and EM kit for option




Speedfit LED geartray and diffuser



| ITEM    | POWER | LUMEN | LM/W | SIZE          |
|---------|-------|-------|------|---------------|
| NTP115A | 20    | 2800  | 140  | 660x80x72mm   |
| NTP115A | 40    | 5600  | 140  | 1200x80x72mm  |
| NTP115A | 60    | 8400  | 140  | 1500x80x72mm  |
| NTP115B | 20    | 2800  | 140  | 660x110x87mm  |
| NTP115B | 40    | 5600  | 140  | 1200x110x87mm |
| NTP115B | 60    | 8400  | 140  | 1500x110x87mm |
| NTP115B | 75    | 10500 | 140  | 1800x110x87mm |

NTP116

- High-brightness LED chips, efficacy up to 140lm/W
- CCT and power switch option available
- Polycarbonate base and diffuser, stainless steel clips
- Plug-and-play sensor and EM kit for option



15cm bracket distance, easy fit



BESA holes and side cable entries




| ITEM   | POWER | LUMEN | LM/W | SIZE          |
|--------|-------|-------|------|---------------|
| NTP116 | 20    | 2800  | 140  | 600x100x75mm  |
| NTP116 | 40    | 5600  | 140  | 1200x100x75mm |
| NTP116 | 60    | 8400  | 140  | 1500x100x75mm |
| NTP116 | 70    | 9800  | 140  | 1800x100x75mm |

NTP114

- CCT & power switch available
- Junction box wiring on both side, allowing linear connection
- Designed for surface and suspending mounting in industrial applications



CCT & power switch inside of junction box

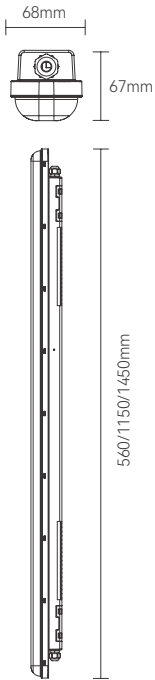

| ITEM   | POWER | LUMEN | LM/W | SIZE         |
|--------|-------|-------|------|--------------|
| NTP114 | 18    | 2160  | 120  | 560x68x67mm  |
| NTP114 | 36    | 4320  | 120  | 1150x68x67mm |
| NTP114 | 45    | 5400  | 120  | 1450x68x67mm |

NTP120A


- High-brightness LED chips, efficacy up to 150lm/W
- Polycarbonate base and diffuser
- Tool-less fast wiring on both sides, allowing linear connection
- Sensor variant with remote control available



Tool-less fast wiring



15cm bracket distance, easy fit



| ITEM    | POWER | LUMEN | LM/W | SIZE         |
|---------|-------|-------|------|--------------|
| NTP120A | 20    | 3000  | 150  | 600x70x64mm  |
| NTP120A | 40    | 6000  | 150  | 1200x70x64mm |
| NTP120A | 50    | 7500  | 150  | 1500x70x64mm |

NTP120C

- CCT switch available
- Junction box wiring on both side, allowing linear connection
- Designed for surface and suspending mounting in industrial applications



15cm bracket distance, easy fit

NTP122



- High-brightness LED chips, efficacy up to 150lm/W
- CCT & power switch available
- Rotatable end caps on both sides for easy opening and wiring



Pull-out piano terminal



CCT & power switch




| ITEM    | POWER | LUMEN | LM/W | SIZE         |
|---------|-------|-------|------|--------------|
| NTP120C | 20    | 2000  | 100  | 600x70x64mm  |
| NTP120C | 40    | 4000  | 100  | 1200x70x64mm |
| NTP120C | 50    | 5000  | 100  | 1500x70x64mm |

| ITEM   | POWER | LUMEN | LM/W | SIZE         |
|--------|-------|-------|------|--------------|
| NTP122 | 20    | 3000  | 150  | 600x77x69mm  |
| NTP122 | 40    | 6000  | 150  | 1200x77x69mm |
| NTP122 | 50    | 7500  | 150  | 1500x77x69mm |



NTP118

- High-brightness LED chips, efficacy up to 140lm/W
- CCT switch option available
- Polycarbonate base and diffuser
- Rotatable end caps on both sides for easy opening and wiring
- Pull-out push-fit terminal at both ends for quick wiring



Speed Opening and wiring



Tool-less replaceable LED module



NTP119

- High-brightness LED chips, efficacy 120lm/W
- CCT and power switch option available
- Polycarbonate base and diffuser
- Rotatable end caps on both sides for easy opening and wiring



Rotatable end caps and piano key terminal



| ITEM   | POWER | LUMEN | LM/W | SIZE         |
|--------|-------|-------|------|--------------|
| NTP118 | 18    | 2500  | 140  | 617x72x67mm  |
| NTP118 | 36    | 5000  | 140  | 1117x72x67mm |
| NTP118 | 45    | 6300  | 140  | 1467x72x67mm |

| ITEM   | POWER | LUMEN | LM/W | SIZE         |
|--------|-------|-------|------|--------------|
| NTP119 | 18    | 2160  | 120  | 600x58x52mm  |
| NTP119 | 36    | 4320  | 120  | 1200x58x52mm |
| NTP119 | 45    | 5400  | 120  | 1500x58x52mm |

NTP112


- Toolless fast wiring
- CCT switch option available
- Polycarbonate base and diffuser



Toolless fast wiring



3CCT switch



| ITEM   | POWER | LUMEN | LM/W | SIZE         |
|--------|-------|-------|------|--------------|
| NTP112 | 18    | 2160  | 120  | 600x43x33mm  |
| NTP112 | 36    | 4320  | 120  | 1160x43x33mm |
| NTP112 | 45    | 5400  | 120  | 1460x43x33mm |



# 4

## Bulkhead

Our bulkhead lights are easy to install with plug-and-play connectors, saving electricians' time. Optional integrated sensors and emergency versions make them ideal for corridors, stairwells, and secure areas.



NBH112


- CCT and power switch option available
- High impact polycarbonate body, IK10 (impact resistance)
- 4 side and 1 rear cable entry
- Sensor and EM kit for option



Anti-theft screw fixed cover.



Cable entries for loop-in and loop-out.



| ITEM   | POWER       | LUMEN | LM/W | SIZE      |
|--------|-------------|-------|------|-----------|
| NBH112 | 24/20/16/12 | 2880  | 120  | Ø320x88mm |

NBH122


- CCT and power switch option available
- High impact body, IK10 (impact resistance)
- Side and rear cable entries, fit to various applications
- Frame reach ceiling, anti-theft
- Sensor and EM kit for option



Side and rear cable entries



Fit to BESA box installation.



| ITEM   | POWER    | LUMEN | LM/W | SIZE      |
|--------|----------|-------|------|-----------|
| NBH122 | 24/18/12 | 2400  | 100  | Ø300x70mm |

# NBH111

- High-brightness LED chips, efficacy up to 140lm/W
- CCT and power switch option available
- Polycarbonate body and diffuser, 4 side and 1 rear entry points
- Plug-and-play sensor and EM kit for option



Components plug and play



| ITEM   | POWER   | LUMEN | LM/W | SIZE      |
|--------|---------|-------|------|-----------|
| NBH111 | 18/14/9 | 1800  | 100  | Ø300x70mm |
| NBH111 | 18/14/9 | 2160  | 120  | Ø300x70mm |
| NBH111 | 18/14/9 | 2520  | 140  | Ø300x70mm |

# NBH121

- CCT and power switch option available
- High impact polycarbonate body, IK10 (impact resistance)
- 4 side and 1 rear conduit entry points
- Plug-and-play sensor and EM kit for option



Integral LED geartray and diffuser, hold in place, easy install



| ITEM   | POWER | LUMEN | LM/W | SIZE       |
|--------|-------|-------|------|------------|
| NBH121 | 15    | 1200  | 80   | Ø308x88mm  |
| NBH121 | 20    | 1600  | 80   | Ø308x88mm  |
| NBH121 | 18    | 1440  | 80   | Ø350x106mm |
| NBH121 | 24    | 1920  | 80   | Ø350x106mm |

# NBH115


- CCT and power switch option available
- High impact polycarbonate body, IK10 (impact resistance)
- 6 side and 2 rear cable entries
- Sensor and EM kit for option



Installation accessories for north Europe



Cable entries for loop-in and loop-out.




| ITEM   | POWER | LUMEN | LM/W | SIZE      |
|--------|-------|-------|------|-----------|
| NBH115 | 12    | 1440  | 120  | Ø250x62mm |
| NBH115 | 15    | 1800  | 120  | Ø300x66mm |
| NBH115 | 24    | 2880  | 120  | Ø300x66mm |

# NBH116

- Speed-fit bracket and junction box for easy installation
- CCT switch option available
- White and black body colour available



Speedfit bracket and junction box, easy installation



| ITEM   | POWER | LUMEN | LM/W | SIZE      |
|--------|-------|-------|------|-----------|
| NBH116 | 20    | 1800  | 90   | Ø200x55mm |
| NBH116 | 30    | 2700  | 90   | Ø300x55mm |
| NBH116 | 40    | 3600  | 90   | Ø400x55mm |

NBH119


- CCT and power switch option available
- High impact body, IK10 (impact resistance)
- Junction box for quick wiring
- Adjustable PIR sesor



Adjustable PIR sesor



Junction box with CCT and power switches inside

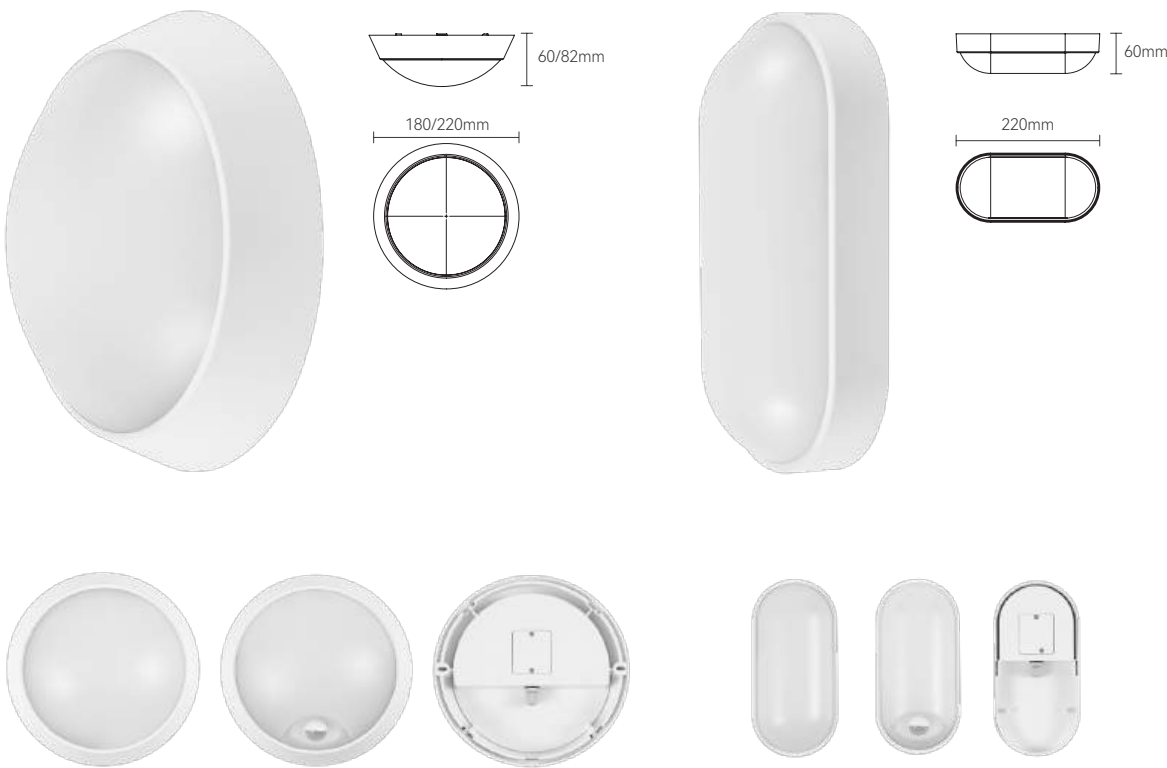


| ITEM     | POWER | LUMEN | LM/W | SIZE         |
|----------|-------|-------|------|--------------|
| NBH119-R | 15    | 1500  | 100  | Ø180x60mm    |
| NBH119-R | 20    | 2000  | 100  | Ø220x82mm    |
| NBH119-O | 15    | 1500  | 100  | 220x106x60mm |



5


# Ceiling Light

Our ceiling lights feature a minimalist, ultra-slim design for easy installation. With optional sensor and emergency functions, they deliver smarter, more energy-efficient lighting for residential and public applications.



NCL114

- Edge-lit ceiling light with ultra-thin shape, indirect backlight available
- Speed-fit bracket and push-fit terminal for easy installation
- CCT and power switch option available
- RGB and microwave sensor version for option



Speedfit bracket, easy installation



| ITEM    | POWER | LUMEN | LM/W | SIZE         |
|---------|-------|-------|------|--------------|
| NCL114R | 12    | 1080  | 90   | Ø225x28mm    |
| NCL114R | 18    | 1620  | 90   | Ø292x28mm    |
| NCL114R | 24    | 2160  | 90   | Ø420x28mm    |
| NCL114S | 12    | 1080  | 90   | 225x225x28mm |
| NCL114S | 18    | 1620  | 90   | 292x292x28mm |
| NCL114S | 24    | 2160  | 90   | 420x420x28mm |

NCL113

- Speed-fit bracket and junction box for easy installation
- CCT & power switch option available
- Round & square shapes available
- Sensor and emergency model available



Speedfit bracket, easy installation



| ITEM    | POWER | LUMEN | LM/W | SIZE         |
|---------|-------|-------|------|--------------|
| NCL113R | 15    | 1500  | 100  | Ø220x50mm    |
| NCL113R | 18    | 1800  | 100  | Ø280x50mm    |
| NCL113R | 24    | 2400  | 100  | Ø330x50mm    |
| NCL113R | 30    | 3000  | 100  | Ø330x50mm    |
| NCL113R | 36    | 3600  | 100  | Ø400x50mm    |
| NCL113S | 15    | 1200  | 80   | 220x220x50mm |
| NCL113S | 18    | 1440  | 80   | 280x280x50mm |
| NCL113S | 24    | 1920  | 80   | 330x330x50mm |

NCL121


- North Europe used accessories available
- CCT switch option available
- With and without frame versions available
- Easy fit diffuser



Installation accessories for north Europe



Easy fit diffuser

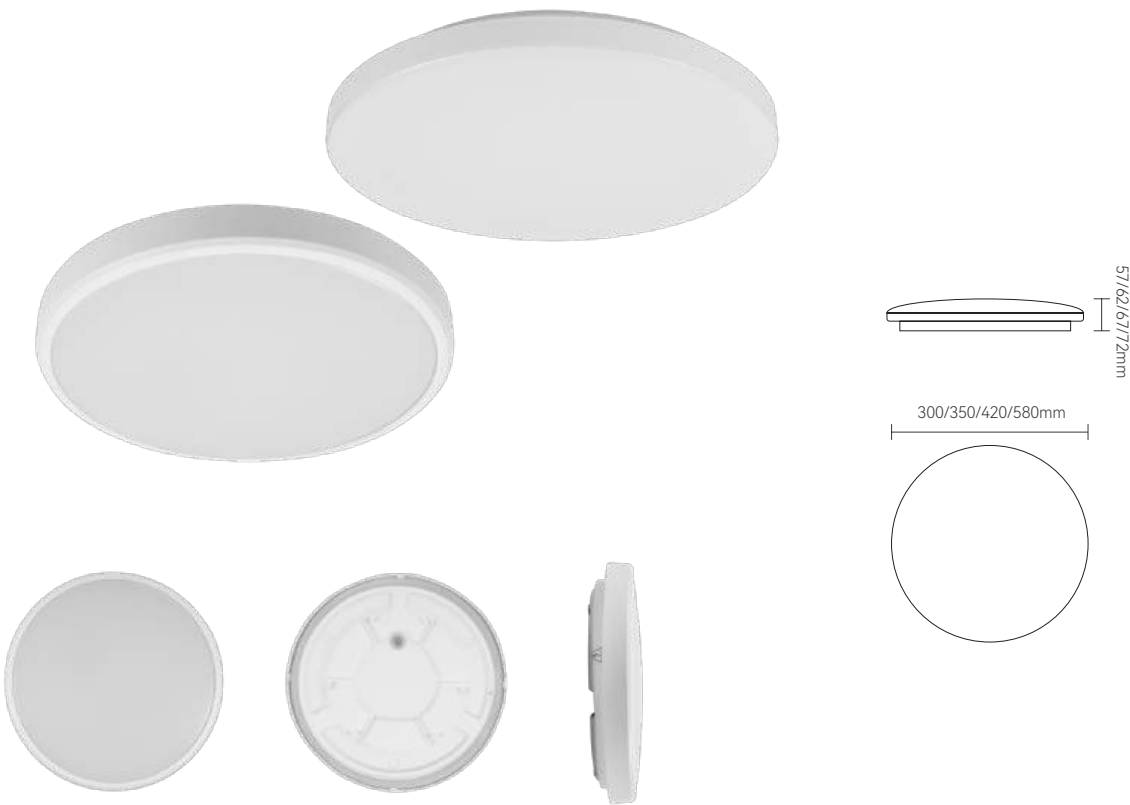

| ITEM    | POWER | LUMEN | LM/W | SIZE      |
|---------|-------|-------|------|-----------|
| NCL121A | 15    | 1500  | 100  | Ø300x57mm |
| NCL121A | 24    | 2400  | 100  | Ø350x62mm |
| NCL121A | 28    | 2800  | 100  | Ø420x67mm |
| NCL121A | 42    | 4200  | 100  | Ø580x72mm |
| NCL121B | 15    | 1200  | 80   | Ø300x57mm |
| NCL121B | 24    | 1920  | 80   | Ø350x62mm |

NCL115

- Speed-fit bracket and slim terminal for easy installation
- CCT switch option available
- Remote control version available



Speedfit bracket, easy installation



| ITEM    | POWER | LUMEN | LM/W | SIZE         |
|---------|-------|-------|------|--------------|
| NCL115R | 18    | 1800  | 100  | Ø230x55mm    |
| NCL115R | 24    | 2400  | 100  | Ø300x55mm    |
| NCL115R | 32    | 3200  | 100  | Ø400x55mm    |
| NCL115R | 40    | 4000  | 100  | Ø470x55mm    |
| NCL115S | 18    | 1800  | 100  | 230x230x55mm |
| NCL115S | 24    | 2400  | 100  | 300x300x55mm |
| NCL115S | 32    | 3200  | 100  | 400x400x55mm |
| NCL115S | 40    | 4000  | 100  | 470x470x55mm |

NCL117

- Edge-lit ceiling light with ultra-thin shape
- Speed-fit bracket and slim terminal for easy installation
- CCT switch option available
- Remote control version available
- Various body colours available



Black and golden colors



Speedfit bracket and ultra slim terminal, easy installation



| ITEM    | POWER | LUMEN | LM/W | SIZE          |
|---------|-------|-------|------|---------------|
| NCL117R | 18    | 1620  | 90   | Ø200x25mm     |
| NCL117R | 24    | 2160  | 90   | Ø300x25mm     |
| NCL117R | 36    | 3240  | 90   | Ø400x28mm     |
| NCL117R | 40    | 3600  | 90   | Ø480x28mm     |
| NCL117R | 50    | 4500  | 90   | Ø600x28mm     |
| NCL117R | 70    | 6300  | 90   | Ø750x28mm     |
| NCL117S | 18    | 1620  | 90   | 230x230x25mm  |
| NCL117S | 24    | 2160  | 90   | 300x300x25mm  |
| NCL117S | 36    | 3240  | 90   | 400x400x25mm  |
| NCL117S | 50    | 4500  | 90   | 500x500x25mm  |
| NCL117S | 70    | 6300  | 90   | 300x1200x25mm |

NCL118B

- Speed-fit bracket and slim terminal for easy installation
- CCT & power switch option available
- Various body colours available
- Sensor model available



Speedfit bracket, easy installation



| ITEM    | POWER | LUMEN | LM/W | SIZE      |
|---------|-------|-------|------|-----------|
| NCL118B | 24    | 2400  | 100  | Ø300x42mm |
| NCL118B | 36    | 3600  | 100  | Ø400x42mm |
| NCL118B | 48    | 4800  | 100  | Ø500x42mm |

NCL123

- CCT switch option available
- Speedfit bracket, easy installation
- Ultra slim terminal, quick wiring



Speedfit bracket, easy installation

220-240V

25K  
Hours

2  
YEAR

COLOUR  
CHANGE

IP54

NCL120

- Speed-fit bracket and slim terminal for easy installation
- CCT switch option available



Speedfit bracket and ultra slim terminal, easy installation

220-240V

30K  
Hours

3  
YEAR

COLOUR  
CHANGE

IP20



| ITEM   | POWER | LUMEN | LM/W | SIZE      |
|--------|-------|-------|------|-----------|
| NCL123 | 24    | 2400  | 100  | Ø300x55mm |
| NCL123 | 32    | 3200  | 100  | Ø365x60mm |
| NCL123 | 40    | 4000  | 100  | Ø450x70mm |

| ITEM   | POWER | LUMEN | LM/W | SIZE      |
|--------|-------|-------|------|-----------|
| NCL120 | 18    | 1800  | 100  | Ø230x50mm |
| NCL120 | 24    | 2400  | 100  | Ø300x50mm |
| NCL120 | 32    | 3200  | 100  | Ø380x50mm |
| NCL120 | 40    | 4000  | 100  | Ø480x50mm |

NCL112

- Classic ceiling light with slim and clean shape
- CCT switch option available
- Remote control version available
- PIR sensor model available



PIR sensor model  
Adjustable by inside  
switches



| ITEM    | POWER | LUMEN | LM/W | SIZE         |
|---------|-------|-------|------|--------------|
| NCL112R | 12    | 840   | 70   | Ø250x45mm    |
| NCL112R | 18    | 1260  | 70   | Ø320x50mm    |
| NCL112R | 24    | 1680  | 70   | Ø370x60mm    |
| NCL112R | 36    | 2520  | 70   | Ø480x60mm    |
| NCL112R | 50    | 3500  | 70   | Ø540x70mm    |
| NCL112R | 60    | 4200  | 70   | Ø560x70mm    |
| NCL112S | 12    | 840   | 70   | 280x280x45mm |
| NCL112S | 18    | 1260  | 70   | 330x330x60mm |
| NCL112S | 24    | 1680  | 70   | 380x380x60mm |
| NCL112S | 36    | 2520  | 70   | 430x430x60mm |
| NCL112S | 50    | 3500  | 70   | 530x530x70mm |
| NCL112S | 60    | 4200  | 70   | 540x540x70mm |

