

NLN114



- Fast connecting one by one, easy for electricians
- Different shapes connector available: L, T, cross and round
- Different diffusers available: opal, micro-prism, reflector
- 3CCT & multi-power switch, up and down light version available



Rapid splicing



L, T, cross & round connectors

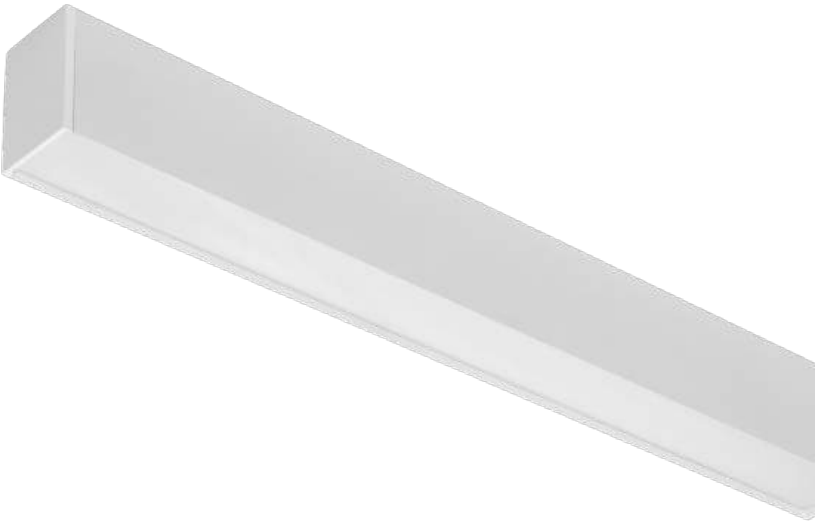

ITEM	POWER	LUMEN	LM/W	SIZE
NLN114	18	1800	100	600x50x75mm
NLN114	30	3000	100	1200x50x75mm
NLN114	38	3800	100	1490x50x75mm
NLN114	45	4500	100	1790x50x75mm
NLN114	60	6000	100	2390x50x75mm
NLN114-L	12	1200	100	155x75x155mm
NLN114-T	9	900	100	250x75x150mm
NLN114-C	15	1500	100	250x75x250mm
NLN114-R	15	1500	100	225x75x230mm

NLN125


- Up and down light version available
- 3CCT & multi-power switch model available
- Available in black, grey & white colors



Up & down light



3CCT & multi-power switch

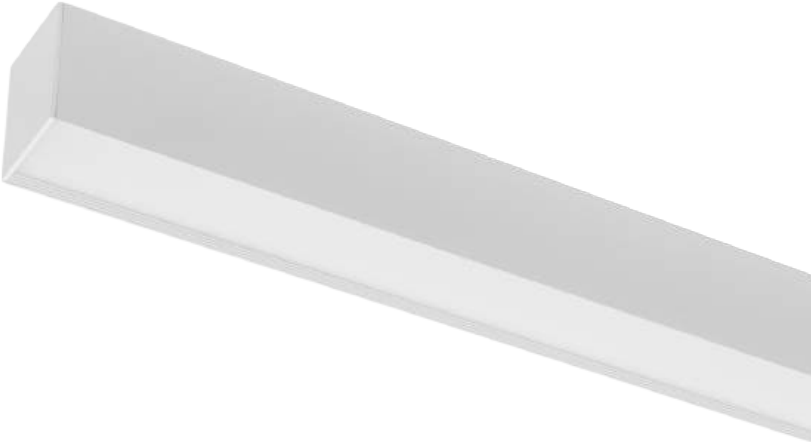

ITEM	POWER	LUMEN	LM/W	SIZE
NLN125	30	3300	110	600x68x90mm
NLN125	40	4400	110	900x68x90mm
NLN125	50	5500	110	1200x68x90mm
NLN125	60	6600	110	1500x68x90mm

NLN121

- Slim figure with 36° beam angle
- 3CCT switch model available
- Available in black, grey & white colors



36° beam angle


220-240V

30K Hours

3 YEAR

COLOUR CHANGE

IP20



ITEM	POWER	LUMEN	LM/W	SIZE
NLN121	20	2000	100	600x25x85mm
NLN121	24	2400	100	900x25x85mm
NLN121	30	3000	100	1200x25x85mm
NLN121	36	3600	100	1490x25x85mm
NLN121	40	4000	100	1790x25x85mm

